


PULL TO OPEN FIRE ALARM COVER

Cato's quality protective alarm covers, manufactured in the U.S., provides a dent and rust proof alternative to metal. It arrives fully assembled, quick to install, the cover can be opened quickly in case of emergency and remains open during inspection and maintenance.

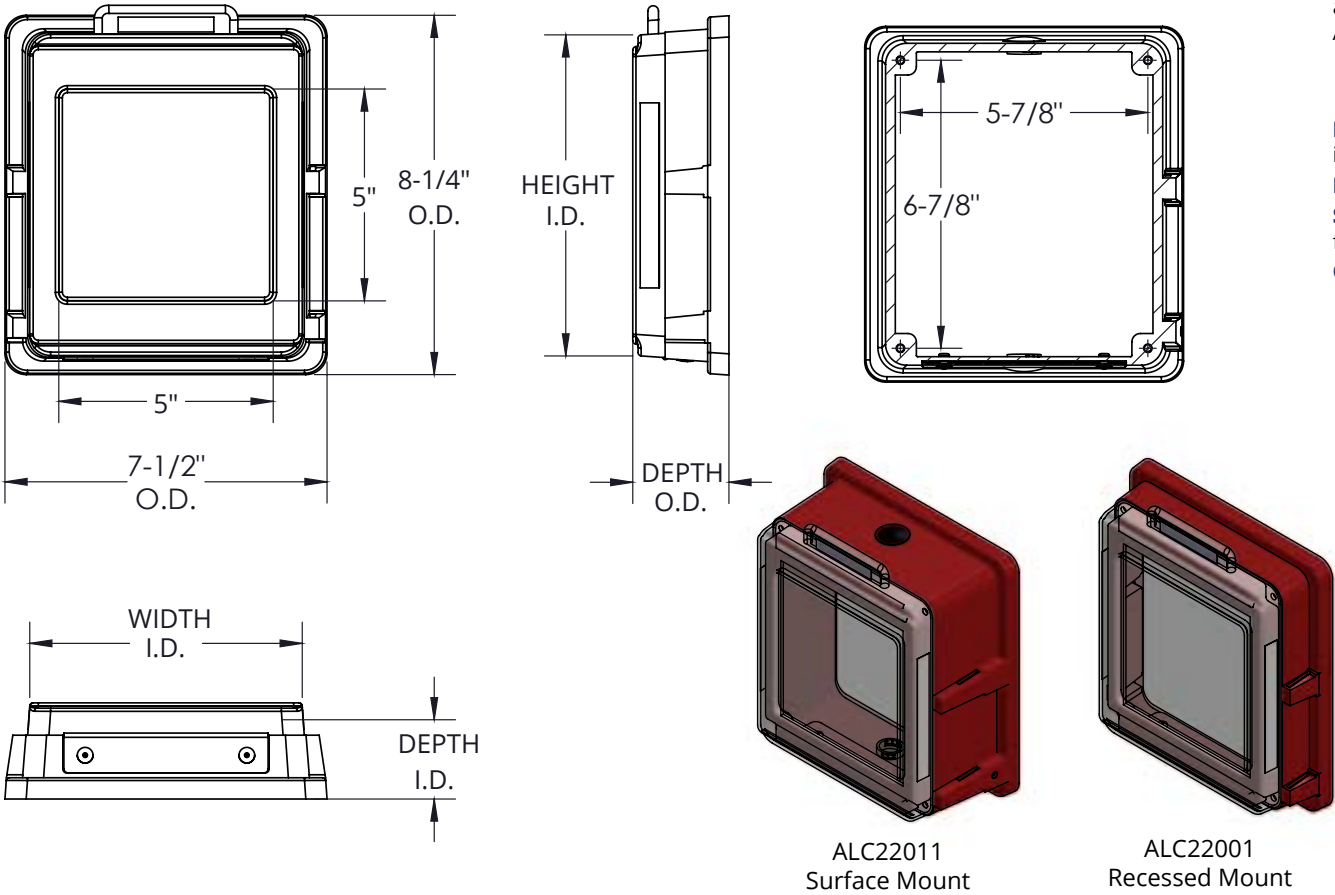

SPECIFICATIONS:

- Body Material:** Injection molded of high-density polypropylene, available in red only
- Cover Material:** Injection molded copolymer polypropylene, available in clear only. Pull handle at the top is designed to ADA specifications.
- Surface mount cover includes cut-outs top and bottom with black nylon snap in dome plug
- Decals:** UV resistant "PULL TO OPEN" and "FIRE" decals included
- Hardware:** Mounting hardware and anchors are included
- Sizes:** Refer to table, listing models and dimensions. Available for recessed or surface mounted alarms.
- Options:** Gasket

QTY	MODEL	PREVIOUS MODEL	ALARM MOUNTING	OPENING METHOD	COVER I.D. W x H x D	COVER O.D. W x H x D	WEIGHT
	ALC22001	220-R	Recessed Mounted Alarm	Pull to Open	6-1/4" x 7-1/4" x 1-3/4"	7-1/2" x 8-1/4" x 2-1/4"	1.5 lbs
	ALC22011	220-S	Surface Mounted Alarm	Pull to Open	6-1/2" x 7-1/2" x 3-1/4"	7-1/2" x 8-1/4" x 3-3/4"	1.7 lbs



9702 Newton Avenue S, Bloomington, MN 55431

© 2026 Activar Construction Products Group, Inc.

800-554-6077

sales@activarcpg.com

www.activarcpg.com

Distributor:		Project:
Contractor:		Approved By:
Date:		Architect:
Scale: N/A	Pages: 1 of 2	Item #:

PULL TO OPEN FIRE ALARM COVER

SECURE FIRE ALARM COVER DECALS		
QTY	MODEL	DESCRIPTION
	CL-418	PULL TO OPEN for alarm cover panel
	CL-420	FIRE for alarm cover sides

PULL TO OPEN

CL-418

FIRE

CL-420

SECURE FIRE ALARM COVER REPLACEMENT PARTS		
QTY	MODEL	DESCRIPTION
	22119	3/16 x 4" screws (surface mount cover)
	22116	3/16 x 2-¼" screws (recessed mount cover)
	22113	Nylon anchors




22119
3/16 x 4"
Screws & Anchors




22113
Nylon Anchors



22116
3/16 x 2-¼"
Screws & Anchors

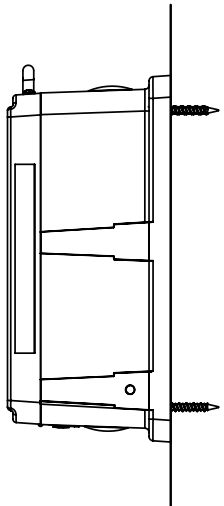

ALC22012
Surface Mount on Wall
Note: Surface mount covers is for installations where the alarm is mounted directly on wall.

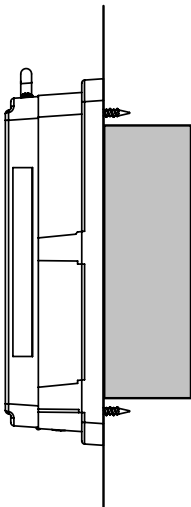

ALC22002
Recessed with Wall Cut-out
Note: Recessed mount cover is for installations with the alarm mounted inside a wall cut out.

ORDER GUIDE - PULL TO OPEN FIRE ALARM COVER - EXAMPLE: ALC22001B

QTY	PREFIX		ALARM MOUNTING				OPENING METHOD		OPTIONS	
	ALC	(Alarm Cover)	220	Alarm Covers, polypropylene red	0	R Recessed	1	Pull to open Unsecured	B	Gasket
					1	S Surface Mounted (plugged electrical cut outs included)				